



IMfinity®

High reliability induction motor range

Variable speed and fixed speed

IE2 High efficiency, premium IE3, super premium IE4 efficiency motors

Non IE for special use

Frame size 80 to 500

0.75 to 1500 kW

LEROY-SOMER™

Nidec
— All for dreams

IMfinity®

Outstanding motor range

IMfinity® platform, the highest standards to meet your expectations

As part of Nidec, Leroy-Somer has operated globally for many years, each providing unparalleled specialist drives and motors technology, expertise and customer care in a wide range of industries. Our quality products with renowned reliability, automation knowledge and technical support have helped our customers meet and exceed their own requirements.

IMfinity® is the new range of induction motor developed by Leroy-Somer to offer the highest standards to satisfy customer expectations:

- **High reliability**
 - Robust housing, with cast iron flange for DE and NDE bearing providing better operation (frame size > 90 mm)
 - Advanced mechanical and electrical design (magnetic core optimization, high grade components, high quality machining and winding process)
- **Express availability**
 - Very short delivery time with a dedicated organization for supplying motors, brake-motors and geared-motors
 - Worldwide usage of standard motors: multi-voltage/multi-frequency, international compliance
- **Energy savings**
 - Fixed speed: Premium IE3 and super premium IE4 efficiency motors
 - Variable speed: Easy to use, high performance motor and drive package for better energy savings



IMfinity®

Impressive advanced technology

Our advanced drives and motors technology and automation solutions are designed by focusing on maximizing energy savings across a wide range of industries, enhancing performance and optimizing productivity.

New regulations define the minimum efficiency level of the motor but more and more variable speed systems made from motor and drive solutions are considered as the most effective combination to generate the highest energy savings.

The new IMfinity® range of motors are developed to offer benefits from state of the art reliability and efficiency, giving customer the choice for an easy-to-select and easy-to-install solution.

Fixed speed
IE3



Variable speed
IE2 + Drive



A range of IE4 motors is available for variable and fixed speed, to optimize the energy efficiency.



Benefit from state of the art reliability and efficiency

	Performance	Reliability	Availability	Selection	Installation
Construction & Design					
Magnetic circuit optimization	+	+			
Air gap optimization	+	+			
Low losses steel lamination	+	+			
Enhanced slot filling	+	+			
Component rationalization			+	+	+
Robust mechanical parts	+	+			+
High quality components	+	+			
Characteristics					
Reduced starting current	+	+			+
Multi-voltages & frequencies			+	+	+
IE2, IE3, IE4 and non IE efficiency levels	+				
Variable speed usage					
Fully characterized	+	+	+	+	+

IMfinity®

World-class compatibility

One unique motor covering 80% of worldwide needs:

- Easier to select
- Easier to source & better availability
- Easier to use
- Stock reduction for OEM

There is a proliferation of energy regulations across the world and new ones are currently being drafted. Since April 2015, Japan has imposed regulations and it is highly likely that other countries such as India, Taiwan, etc will do the same. It is therefore increasingly difficult to choose a motor which complies with all these regulations on the market.

A further issue is the difficulty caused by different voltages and frequencies in the various geographical zones, along with the problem of efficiency classes.

The new IMfinity® motor range is one of the exceptions on the market which can guarantee efficiency levels for the main voltages and frequencies covering at least 80% of power supplies throughout the world, while complying with existing or future energy regulations: One single motor type from the new generation of IMfinity® induction motors is sufficient, where 4 or 5 were needed previously.

IMfinity® IE3 nameplate

Nidec

LEROY-SOMER

3~LSES200LU T
N° 789456 F14 001

2014
IP55 IK08

IE3

93.62
NEMA

Nom. Eff.
94.12

Ta 40°C Ins.Cl F S1

1000n 164kg

DE: 6312 ZZ C3
NDE: 6312 ZZ C3

V	Hz	min-1	KW	cosφ	A
Δ380	50	1455	30	0.85	57.8
Δ400	50	1460	30	0.83	56.5
Δ480	50	1460	30	0.83	32.6
Δ415	50	1465	30	0.81	56.3
Δ460	60	1770	30	0.82	49.6

IEC60361-1

IE240084-1


ISS09_100

Multi voltages
& frequencies
characteristics

Complies with the
regulations of the
USA and Canada



IMfinity® expand your perspectives

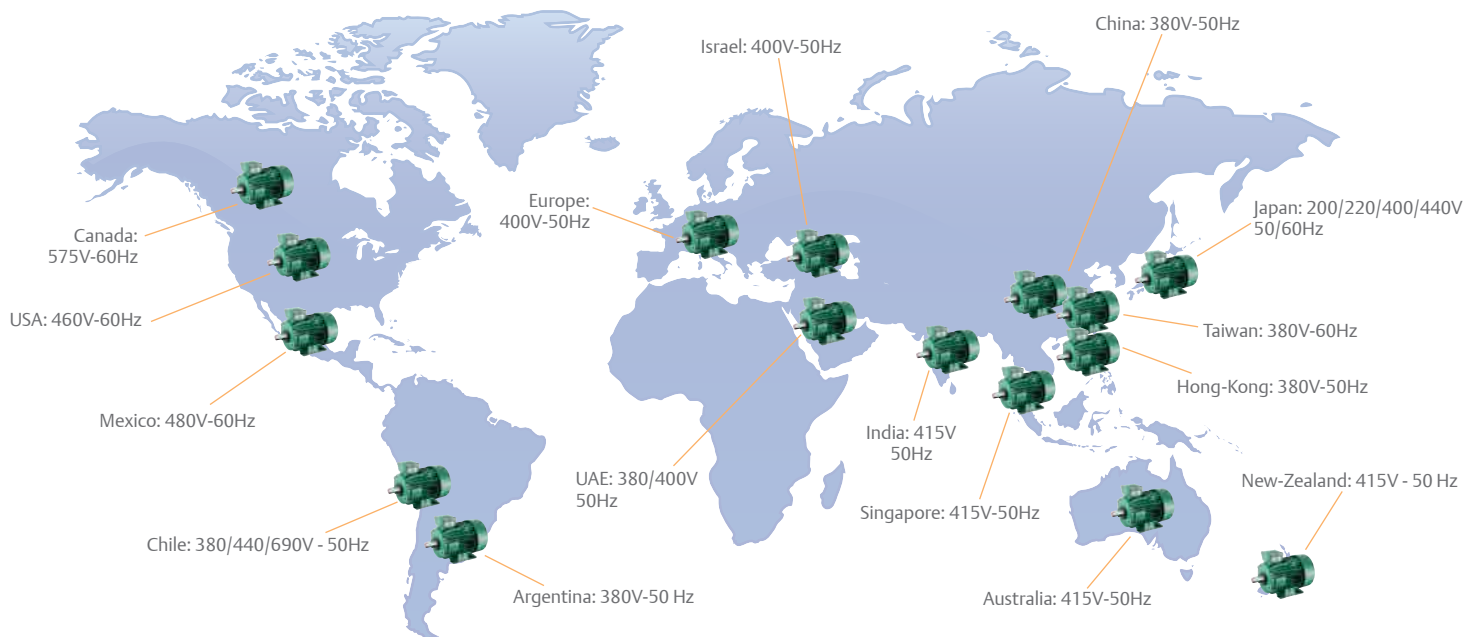


IMfinity®

Designed to last

Mechanically robust

- Robust design based on simulation and test
- Robust cast iron end shields (even for aluminum motors)
- Machining of complete stator on mandrel to ensure perfect concentricity from magnetic axis of the motor
- Rigorous balancing provides a reduced level of vibration




Approved sealing

- IP55 Sealing system approved by an independent and qualified laboratory
- Low energy losses shaft sealing

Extended bearing life time

- Properly sized bearing to accept high shaft load
- High quality grease for a long service life and spaced greasing intervals

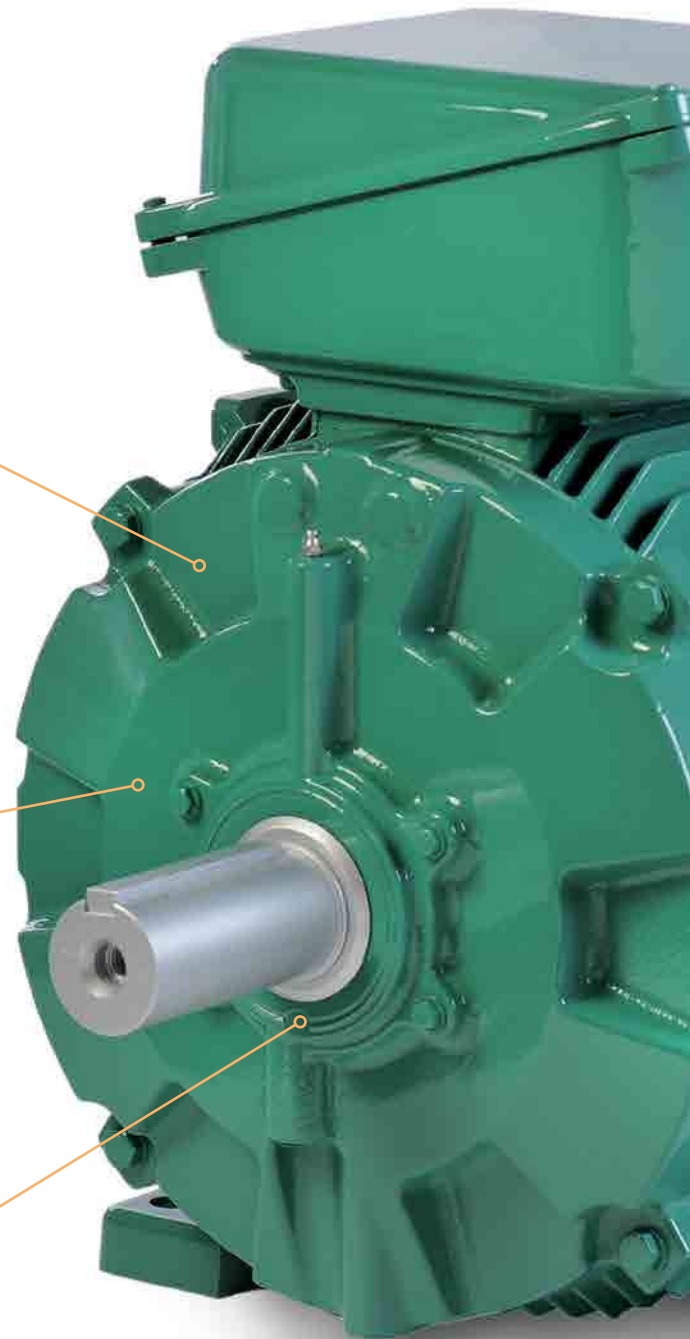

Electrical safety

- Large terminal box for an easier and safer access to connection

Optimized characteristics

- Magnetic circuit optimized to match IE2, IE3, IE4 and non IE classes
- Reduced I_d/I_n
- Designed and characterized for use with inverter or direct-on-line

Thermal protection

- PTC sensors included for frames ≥ 160 mm
- Optional types available with short lead time



Electrically robust

- Dedicated options for variable speed use:
 - reinforced insulated winding system
 - insulated bearings
- Impregnation varnish without solvent
- Designed with 25K thermal reserve

Enhanced cooling

Full optimization of motor cooling:

- to reduce losses
- to prevent hot spots inside winding and bearings
- to keep low noise level

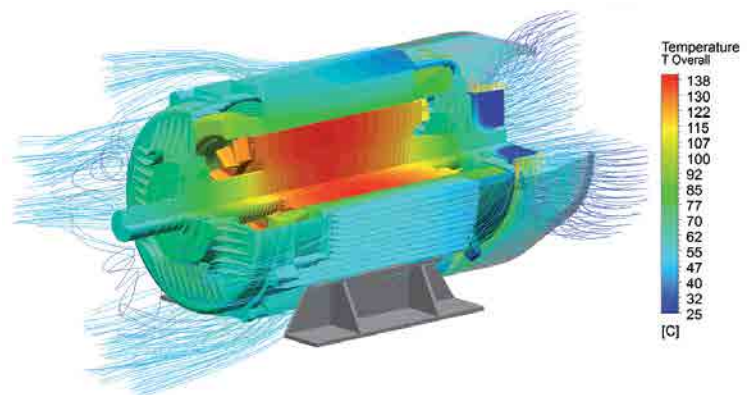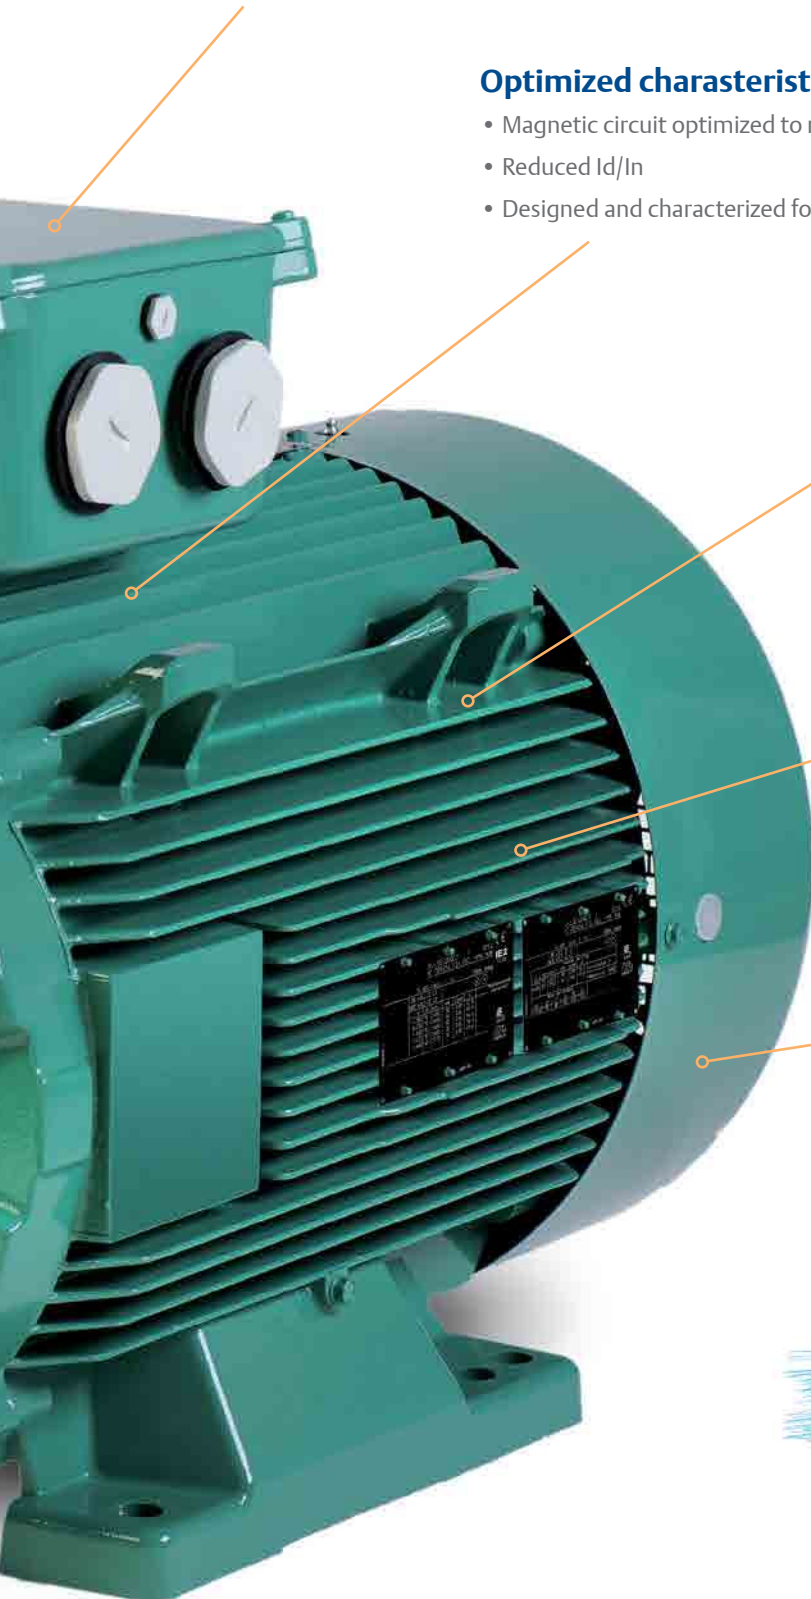

IMfinity®

Powerful versatility

IMfinity® motors are available in several different construction variants and finishes to meet the varied requirements of applications on the market. Whether for manufacturing with constraints on the load factor, cycle profile, productivity, etc, or for processes with harsh operating conditions and environments, there is an IMfinity motor that fits the bill.

Typical industries:

Food & Beverage

Packaging

Printing

Plastics & Rubber

Port Logistics

Test Rigs

Textile



Glass

Industrial Refrigeration

Marine

Metals


Mines, Quarries, Cement

Nuclear power

Water

Oil & Gas





Drive & Motor Technology

The widest range of motors and combinations adapted to the various needs of industries and applications

The IMfinity® motor ranges (aluminium, cast iron, IP23 drip-proof and liquid cooled frames) are designed to allow a large combination of adaptations, such as gearboxes, brakes, speed feedback (encoders), forced ventilation units, etc.

All of these motors, with or without special adaptation, are designed to work with variable speed drives, such as the Unidrive M & Powerdrive ranges.

Global guarantee from a single manufacturer

The combination of a motor-drive package made by a single manufacturer ensures excellent performance of components designed for optimum operation, backed up by a comprehensive warranty from a single source.

IMfinity® platform



LS
Non IE
Aluminium IP55
Frame size 56 up to 225 mm
2, 4 & 6 poles
0.09 up to 45 kW



LSES
IE2 - IE3
Aluminium IP55
Frame size 80 up to 315 mm
2, 4 & 6 poles
0.75 up to 200 kW



FLSES
IE2 - IE3 - IE4
Cast iron IP55
Frame size 80 up to 450 mm
2, 4 & 6 poles
0.75 up to 900 kW



PLSES
IE2 - IE3
ODP / IP23
Frame size 225 up to 450 mm
2, 4 & 6 poles
55 up to 900 kW



LC
IE3
Liquid cooled / IP55
Frame size 315 up to 500 mm
2, 4 & 6 poles
150 up to 1500 kW

Geared motors



Compabloc
up to 14,500 Nm



Orthobloc
up to 23,000 Nm



Manubloc
up to 14,500 Nm

Brake motors



FFB from 0.12 to 22 kW



FCPL from 37 to 400 kW

Drives



Unidrive M
0.25 to 2.8 MW



Powerdrive F300
1.1 to 200 kW



Powerdrive MD2
45 kW to 2.8 MW



Varmeca
Built-in variable
speed drive
0.25 to 11 kW

IE2 IMfinity® + Drive

Compliant, cost-effective, guaranteed performance

The implementing regulation of the European directive allows for the possibility of combining a variable speed drive with an IE2 motor as an alternative to replacing it with a fixed-speed IE3 motor.

In addition to ensuring installation compliance, choosing to convert to variable speed can also generate immediate operating profits thanks to:

- Energy savings of up to 50% depending on the application and operating conditions
- Reduced cost of maintenance on the mechanical control components
- Better productivity as a result of improving the process and reducing machine downtime




IE2 IMfinity® + drive: tested, guaranteed performance

Using a drive on an induction motor improves its performance compared to operation on the mains.

The whole IMfinity range of motor-drive units have been tested over the entire speed range, so as to determine precisely the torque and efficiency characteristics available.

These characteristics are made available to manufacturers, integrators and users, in order to optimise the size of the motor-drive unit whilst still ensuring excellent results:

- Torque/speed curves and characteristics available in the technical catalogue
- The configurator, a tool to assist selection of the motor-drive unit, suggests the most suitable combination for the desired operation
- Drive parameter settings and performance indicated on the variable speed nameplate and added to the mains rating plate.

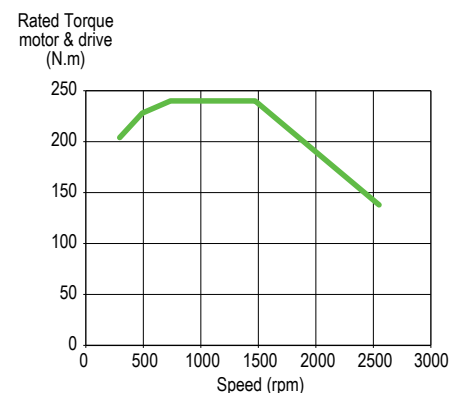



Variable speed options

As an answer to the majority of cases, the IMfinity offer has been designed integrating specific features as standard:

- Standard PTC sensors
- Thermal reserve for maintaining the rated torque over an extended speed range
- Adaptation of the metal support plate to reduce electromagnetic noise

However, to meet particular requirements, options available on short delivery can be provided:

- Winding insulation and insulated bearing for mains voltages ≥ 480 V, long cable lengths and frequent operation during the braking phase
- Forced ventilation unit for availability of the rated torque at very low speeds

An adapted drive offer

Unidrive M: range of drives and solutions designed for industrial applications which require dynamic performance without compromising safety.

Powerdrive: range of drives and solutions adapted to process applications, prioritising integration in existing installations and energy savings.

Nidec LENOX-SOMMER		3x1.5ES200L.U N° 789456 F14 001	2014 IP55	CE IE2 92.32
Ta 40°C Ins Cl F S1		1000m	Jading	
DE 4312 27 03				
NOR 4312 27 02				
V	f	Im	IA	Cosφ
4.360	50	1455	30	0.85
0.730	75	1450	30	0.83
1.400	90	1440	30	0.83
1.415	50	1440	30	0.81
1.460	60	1770	30	0.83
Must be used with motor 45L				
COP 2.5				

Nidec

3x-1.5ES200L.R

2014

N° 789456 F14 001

IP55 IE2

LENOX-SOMMER

Ta 40°C Ins Cl F S1

1000m 16kg

DE 4312 27 03

NOR 4312 27 02

V	f	Im	IA	cosφ	motor settings
4.400	50	1455	28	0.85	5 A
0.440	87	2545	48	0.85	97.8

min.FSW band 3

Nobles (m.s) 5000

Motor per forance

Hz	1	17	25	30	87
----	---	----	----	----	----

17.7m	78	88	100	100	100
-------	----	----	-----	-----	-----

IEC 60335-1

IEC 60335-2

IEC 60335-3

IEC 60335-4

IEC 60335-5

IEC 60335-6

IEC 60335-7

IEC 60335-8

IEC 60335-9

IEC 60335-10

IEC 60335-11

IEC 60335-12

IEC 60335-13

IEC 60335-14

IEC 60335-15

IEC 60335-16

IEC 60335-17

IEC 60335-18

IEC 60335-19

Drives & Motors services

Customized local services and round-the-clock support



- Audit and consultation
- Industry leading install base audits
- Optimizing energy savings and payback
- Retrofit and system upgrades
- Installation and commissioning
- Comprehensive training
- Maintenance
- Global facilities and resources



A strong union that benefits all our customers

Through our integrated organization, we have an enhanced global presence with 5,500 employees. Our combined local support & services provide:

 5,500 employees



40+ Automation Centers

Providing excellent customer support for any product, automation solutions or service requirements



23 Manufacturing sites

Producing a comprehensive range of high quality products, optimized for industry-specific customer requirements



8 Engineering and Design facilities

Develops market leading products and feature-sets using the latest design technology



3 Regional despatch hubs

For quick delivery of product

Our extensive sales and service networks in Europe, Asia Pacific and the Americas are backed-up by hundreds of carefully selected distributors and service partners, often in remote locations, all over the world.



Note that many countries have more than one of the facilities represented by the icons
Services are optimized on a country-by-country basis, so please contact your local sales contact for full details of our local offering.

Express availability

Boost and secure productivity

IMfinity® motors are a full part of our global logistic organization, offering very short lead times on many combinations. Express availability offers very quick reactivity to customer requirements, while boosting and securing their productivity:

- to benefit quickly from energy savings
- to help ensure continuity of production
- to minimize spares required on site

Most standard models from the IMfinity® range of motors can be shipped on the same day for any orders placed before 11.30 am. A wide variety of motors with options are available in 2 or 10 working days, such as:

- Mechanical adaptations: foot and flange mounting, roller bearings, drip cover, stainless steel nameplate, etc
- Electrical adaptations: 400 V winding (star connection) for motors rated ≥ 7.5 kW, non-PTC sensors fitted, etc
- Adaptations for variable speed particular conditions (Main power voltage > 480 V, long cable, ...): insulated bearings, reinforced insulation, forced ventilation unit, etc
- Geared motors with various different combinations (helical in-line, right angle, parallel shaft or worm) and options.

The wide variety of products, options and combinations available from Express Availability (motors, geared-motors and drives) covers the majority of application and industry needs.



Catalogue extract:

Express availability - Induction motors

LSES - IMfinity®

High-efficiency three-phase motors with aluminium housing

Class IE3

SHIPMENT FROM FRENCH FACTORY, IN WORKING DAYS

Orders received, within the maximum quantity limit, by the factory on day D before 11.30 am French local time are written in this grid. If the order is received after 11.30 am add 1 working day for the shipment. For products with options, the shipping time will be the longest shipping time indicated for any of the components. Above the maximum quantity, please consult your sales office.

D	D + 2	D + 10	Please consult
---	-------	--------	----------------

4 poles
1500 min⁻¹

380 V Δ / 400 V Δ / 415 V Δ / 690 V Y 50 Hz - 460 V Δ 60 Hz											
Type	Rated power at 50/60 Hz	IM 1001 (IM B3)		IM 3001 ⁽¹⁾ (IM B5)		IM 2001 ⁽¹⁾ (IM B35)		IM 3601 ⁽¹⁾ (IM B14)		IM 2101 ⁽¹⁾ (IM B34)	
		P _N kW	Code	Max. qty	maxi	Max. qty	Code	Max. qty	Code	Max. qty	Code
LSES 132 MU	7.5	4910776	5	4910777	5	4910778	1	4910780	1	4910781	1
LSES 160 MR	9	4910789	2	4910790	2	4910791	1	4910793	1	4910794	1
LSES 160 M	11	4910800	2	4910801	2	4910802	1				
LSES 160 LUR	15	4910811	2	4910812	2	4910813	2				
LSES 180 M	18.5	4910816	2	4910819	2	4910820	2				
LSES 180 LUR	22	4910825	2	4910826	2	4910827	2				
LSES 200 LU	30	4910832	2	4910833	1	4910834	2				
LSES 225 SR	37	4918552	2	4918553	1	4918554	2				
LSES 225 MG	45	4910839	2	4910840	1	4910841	2				
LSES 250 ME	55	4910846	1			4910848	1				
LSES 280 SD	75	4910852	1			4910854	1				
LSES 280 MD	90	4910858	1			4910860	1				
LSES 315 SP	110	4910864	1			4910866	1				
LSES 315 MP	132	4910870	1			4910872	1				
LSES 315 MP	160	4910876	1			4910878	1				
LSES 315 MR	200	4910882	1			4910884	1				

IMfinity®


Make it your own

IMfinity motors and geared motors fully comply with new regulations on efficiency and are tailored for variable speed and fixed speed operation. Powerful tools have been developed or adapted to help choose the right combination of motor and drive package or motor direct-on-line.

Motor technical catalogue

This catalogue contains in one single volume all the aluminum, cast iron IP55 and drip-proof IP23 motor ranges, with efficiency classes IE2, IE3, IE4 and NIE. For each efficiency class, performances are given when power is supplied to the drive or direct-on-line.

In addition to mechanical/electrical performance and dimensions, the IMfinity® catalogue provides information about regulations and motor markings in the different countries of the world.

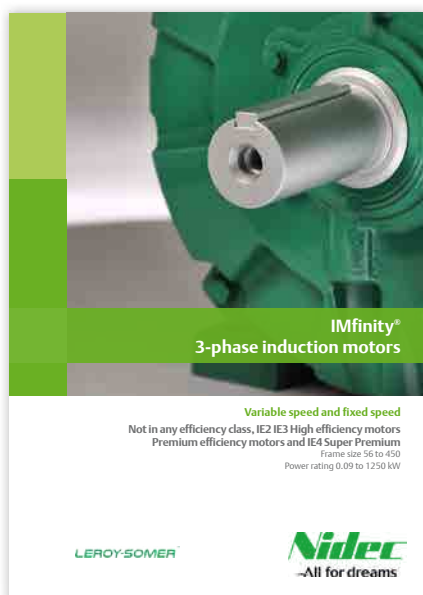

A dedicated guide is available for more information about new versions of the IEC standards and new projects currently in preparation, European directives and their updates as well as future regulations currently in preparation.

Configurator

Configurator is a powerful tool to assist in the selection of motors or geared motors combined with variable speed drives. Continuous evolution of this software reaches a new level with IMfinity motors and geared motors, giving the user the possibility to link-up the motor and drive selection.


Best-in-class motors, geared motors and drives combined with this advanced tool ensure the best association is made when selecting products.




Environment selection



Motor selection

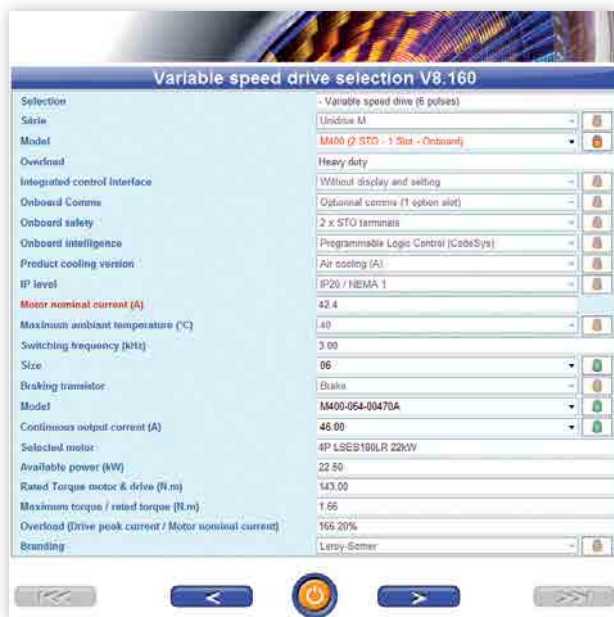

Drive selection, linked to motor selection

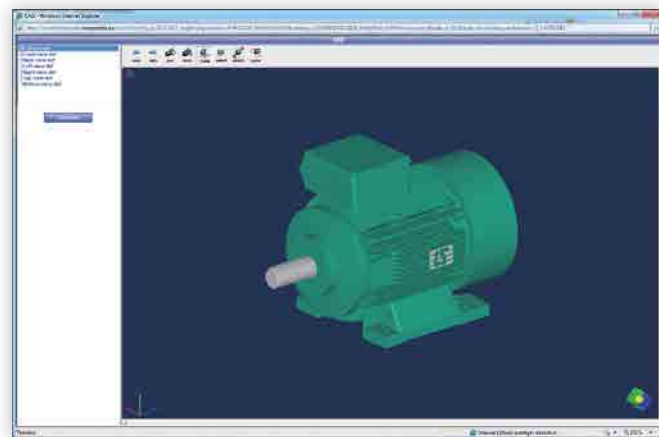

CAD files for motors (2D, 3D)



Motor + Drive package characteristics

LEROY-SOMER™

www.nidecautomation.com

Connect with us at:

twitter.com/ctandls

facebook.com/ctandls

youtube.com/controltechniquesandleroy-somer

theautomationengineer.com (blog)



Nidec
All for dreams

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France.
Share Capital: 65 800 512 €, RCS Angoulême 338 567 258.